



**Bobcat**®

## Drop Hammer Attachment




***One Tough Animal™***

## Specifications

### Drop Hammer

Overall Weight	1925 lb.	(873 kg)
Weight of Hammer	1165 lb.	(528 kg)
Height (hammer fully raised)	74 in.	(1880 mm)
Length	29 in.	(736.6 mm)
Hammer Stroke	38 in.	(965.2 mm)
Impact Energy Rating	3600 ft.-lb.	
Required Flow	15 gpm	57 L/min.
Stroke Rate Per Minute	20	
Maximum Concrete Thickness	14-18 in.	(355.6-457.2 mm)

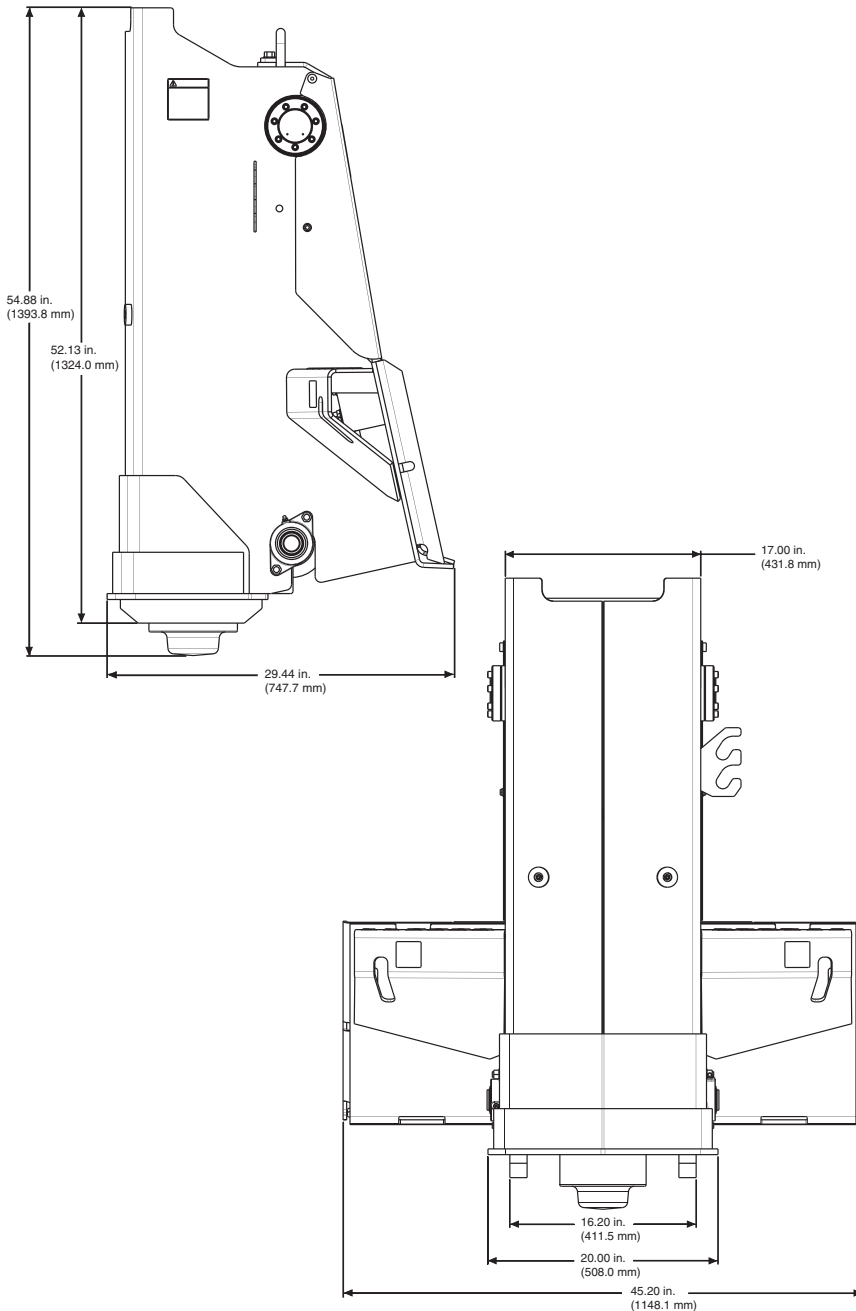

## BREAK IT UP with the Bobcat Drop Hammer Attachment!

The Bobcat drop hammer efficiently demolishes concrete up to 18 inches thick. Because it generates little vibration or noise compared to standard hydraulic breakers, it's the ideal demolition attachment for parking lots, driveways and sidewalks.

The standard Bob-Tach™ mounting system makes easy work of attaching and detaching the drop hammer and loader. When not in use, the hammer stands upright.

A cushioned safety valve permits the weight to fall slowly if hydraulic flow to the attachment is shut off or lost during mid-stroke.

The fast cycle time, 20 blows per minute, allows the operator three seconds to reposition and reset the loader between cycles.

### Features:

- Dual drive motors with chain drive
- Effective, efficient breaking power
- 38 in. maximum stroke
- 1,165 lb. hammer weight
- 3,600 ft.-lb. impact energy rating
- Cushioned safety valve
- Hammer stands upright when not in use
- Cycle time: 20 blows per minute
- Bob-Tach™ mounting system

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

**The Bobcat Attachments Advantage:**  
Bobcat attachments are engineered and manufactured to fit Bobcat loaders for optimum job performance, dependability and durability.

Bobcat Drop Hammer Attachment fits these carrier models:

### Skid-Steer Loaders:

S175  
S185  
S205  
S220  
S250  
S300  
S330  
S630  
S650  
S750  
S770  
S850

### Compact Track Loaders:

T180  
T190  
T250  
T300  
T320  
T630  
T650  
T750  
T770  
T870

### All-Wheel Steer Loaders:

A300  
A770



Printed on 10% recycled paper

